



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-BS-22002E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>



Your Dreams, Our Challenge

Architectural Glass Asia Pacific Company,AGC Inc

Pyrolytic Coated Glass



### Functional unit

1ton

### System boundary

final products       intermediate products  
Raw material acquisition-Distribution-Production

### Main specifications of the product

Products type: Stopsol, Sunergy

Planibel Pyrolytic Low-E

Production sites: Sidoarjo Factory

(PT Asamimas Flat Glass Tbk)

Main thickness(unit : mm, t=thickness): t=2~12mm

Area: 33.3~200m<sup>2</sup>

### Company Information

CSR group, Architectural Glass Asia Pacific Company

Tel : +81-3-3218-5617

<https://agc-glassasia.com/>

Registration#	JR-BS-22002E
PCR number	PA-171100-BS-01
PCR name	Flat glass
Publication date	10/27/2022
Verification date	10/20/2022
Verification method	Product-by-product
Verification#	JV-BS-22002
Expiration date	10/19/2027
PCR review was conducted by:	
Approval date	8/19/2022
PCR review	Ken Yamagishi
panel chair	Sustainable Management Promotion Organization

### Third party verifier\*

Yuki Sakamoto

Independent verification of data & declaration in accordance with ISO14025


internal       external

\*Auditor's name is stated if system certification has been performed.

Registration number : JR-BS-22002E



1. Results of life cycle impact assessment (LCIA)

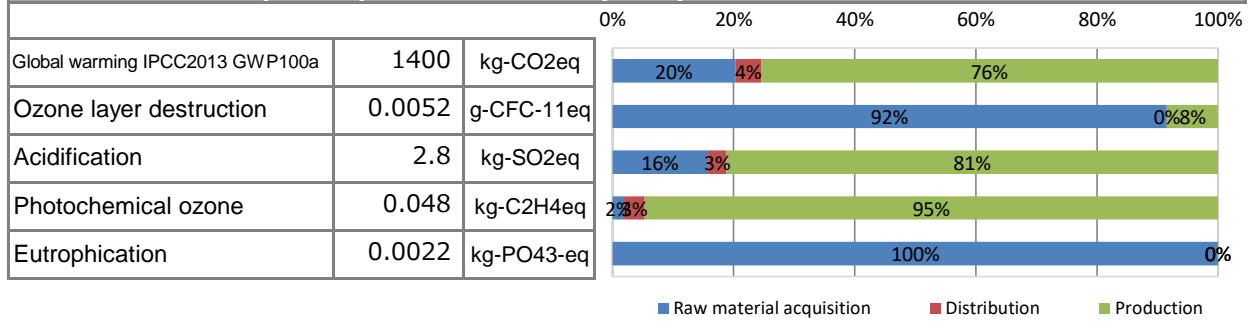

Parameter	stage	Unit	Total	Raw material acquisition	Distribution	Production
Global warming IPCC2013 GWP100a		kg-CO <sub>2</sub> eq	1.4E+03	2.8E+02	5.7E+01	1.0E+03
Ozone layer destruction		g-CFC-11eq	5.2E-03	4.7E-03	3.8E-07	4.4E-04
Acidification		kg-SO <sub>2</sub> eq	2.8E+00	4.4E-01	8.5E-02	2.2E+00
Photochemical ozone		kg-C <sub>2</sub> H <sub>4</sub> eq	4.8E-02	9.1E-04	1.6E-03	4.5E-02
Eutrophication		kg-PO <sub>4</sub> <sup>3-</sup> eq	2.2E-03	2.2E-03	3.6E-13	3.0E-07

2. Life cycle inventory analysis (LCI)

Parameter	Unit
Non-renewable material resources	1.4E+03 kg
Non-renewable energy resources	1.9E+04 MJ
Renewable material resources	3.1E+02 MJ
Renewable primary energy	5.2E+02 kg
Consumption of freshwater	1.9E+00 m <sup>3</sup>

3. Material composition

Material	Unit
Silica sand	44.4 %
Soda ash	13.4 %
Dolomite	15.7 %
Cullet	23.0 %
Others	3.4 %

4. Waste to disposal

Parameter	Unit
Hazardous waste	0.00E+00 kg
Non-hazardous waste.	1.7E+00 kg

\*Data derived from LCA and not assigned to the impact categories of LCIA

5. Additional explanation

These data are an average of Stopsol, Sunergy and Planibel Pyrolytic Low-E, and do not represent data for individual products.



EcoLeaf

Type III Environmental Declaration (EPD)

Registration number : JR-BS-22002E

Japan EPD Program by SuMPO

Sustainable Management Promotion Organization

2-1, Kaji-cho 2 chome, Chiyoda-ku, Tokyo Japan

<https://ecoleaf-label.jp/>

#### 6-1. Supplementary environmental information

The Products are manufactured in ISO14001 certified factories.

#### 6-2. Regulated hazardous substances

Substance	CAS No.	Reference to standards or regulations
Sulfur dioxide	7446-09-5	Industrial Safety and Health Act
Cobalt monoxide	1307-96-6	Industrial Safety and Health Act
Dimethylformamide	68-12-2	Industrial Safety and Health Act
Butyltin Trichloride	1118-46-3	Industrial Safety and Health Act
Ethylene	74-85-1	Industrial Safety and Health Act

#### 7. Assumptions of secondary data used

We use the IDEA v2.1.3 data

#### 8. Remarks

—

- For data quantification, please refer to PCR and Rules on quantification and declaration.
- Comparative assertion is permitted only when Rules on quantification and declaration are satisfied.  
(Reference URL : <https://ecoleaf-label.jp/regulation/>)

Registration number : JR-BS-22002E